


## Fuel Sample/Pumpout Instructions

Vehicles competing in the Mustang Challenge series will be provided with a fuel sample/pumpout port that installs inline between the fuel rail and fuel line underhood. This port uses an Aeroquip male coupling; use one of the female couplings listed to make a mating hose:

Aeroquip P/N	Description
FCM3083	Male Coupling to 1/8-27 NPT Male, as supplied with port
FCM3081	Female Coupling to 1/8-27 NPT Female, for pumpout hose
FCM3082	Female Coupling to 1/4-18 NPT Female, for pumpout hose
FCM3087	Dust Cap for Male Coupling

These fittings are available from Aeroquip dealers, or:  
 Detroit Flexible Metal / Auto-Cycle-Marine  
 2921 Industrial Row  
 Troy, Michigan 48084  
 248-280-0030 / 248-280-1171 / 800-467-3669  
 Darin Stocker Darin@hosenow.com

To enable the fuel pump for fuel pumpout, first disconnect connector C4033 from the Fuel Pump Driver Module, located in the trunk on the driver's side rear wall of the spare tire well:

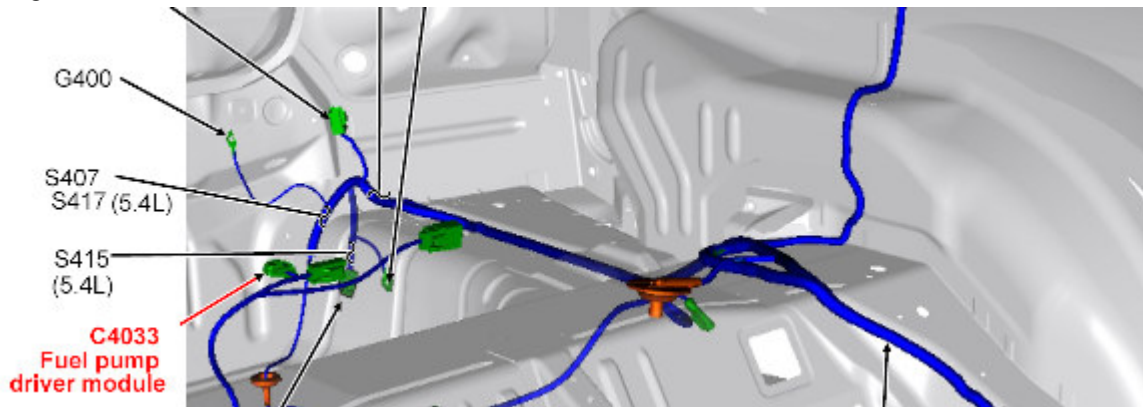

Then jump pins 2-3 and 4-5 on the connector. The ignition switch must be on for the fuel pump to run.

