

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD PERFORMANCE PARTS.

Please visit <u>www.performanceparts.ford.com</u> for the most current instruction information

!!! PLEASE READ ALL OF THE FOLLOWING INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION. AT ANY TIME YOU DO NOT UNDERSTAND THE INSTRUCTIONS, PLEASE CALL THE FORD PERFORMANCE TECHLINE AT 1-800-367-3788 !!!



GRILLE KIT:

Quantity	Part Name
1	Accelerator Pedal
1	Brake Pedal Cover

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 1 of 6




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD PERFORMANCE PARTS.

NOTE: To prevent setting Diagnostic Trouble Codes (DTCs), make sure the ignition switch is in the OFF position prior to disconnecting the accelerator pedal electrical connector.

INSTALLATION INSTRUCTIONS:

STEP 1: Disconnect the accelerator pedal sensor electrical connector by lifting the RED locking retainer, depress the BLACK retaining clip and remove connector. Remove the (3) nuts. Remove the accelerator pedal and sensor assembly.

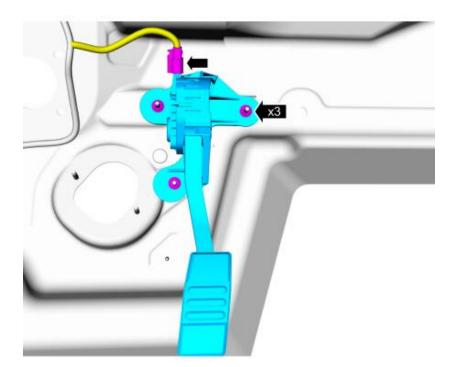

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD PERFORMANCE PARTS.

STEP 2: Install the new accelerator, install the (3) nuts removed in STEP 1. Torque to 80 lb.in (9 Nm)



STEP 3: Connect the accelerator pedal electrical connector. Secure by depressing the RED locking retainer.

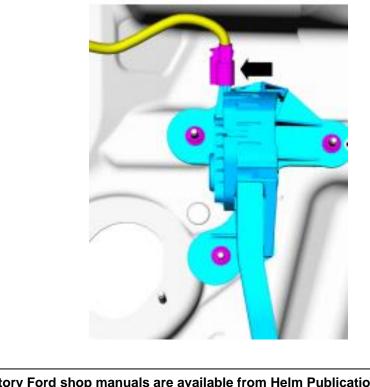

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD PERFORMANCE PARTS.

STEP 4: Using a trim removal tool, gently work the tool around the backside of the brake pedal cover to detach. Remove the brake pedal cover.







Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 4 of 6



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD PERFORMANCE PARTS.

STEP 5: Place the new brake pedal cover over the pedal. Start in one corner and slowly work the cover over the edges of the pedal. A trim removal tool can be used to assist in guiding the cover edges over the pedal.





Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 5 of 6



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD PERFORMANCE PARTS.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 6 of 6