



PLEASE READ ALL OF THE FOLLOWING INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION. AT ANY TIME YOU DO NOT UNDERSTAND THE INSTRUCTIONS, PLEASE CALL THE ANDERSON COMPOSITES CUSTOMER SERVICE LINE AT 1-877-624-2662 (9:00 AM - 5:30 PM CALIFORNIA TIME, MON-FRI)

#### **DISASSEMBLY – Front Bumper Cover Removal**

- 1. Remove the front wheels and tires. Torque 150 lb. ft (204Nm)
- 2. If equipped, on both sides, remove the screws, the bolts and splitter wickers

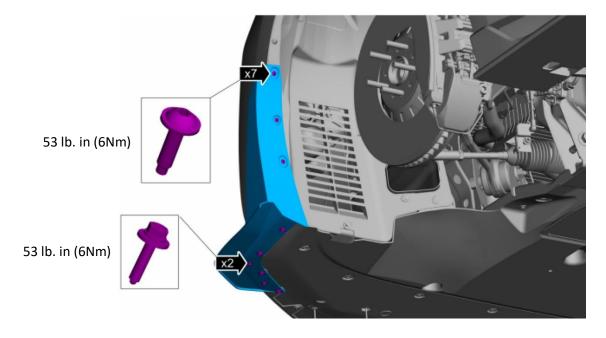


3. Remove the screw covers

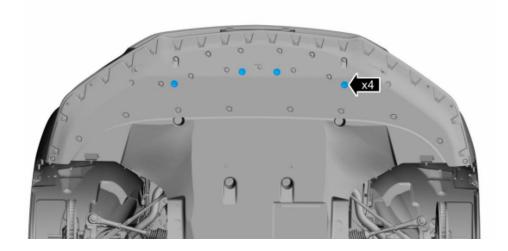




4. Remove the screws and the lower air splitter

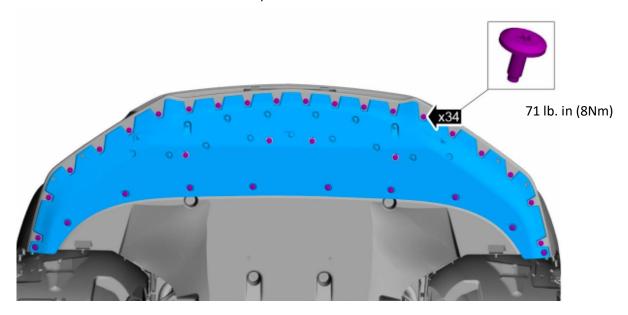

5. Remove the bolts, the screws, push pins, the trim pin and the under engine closeout panel

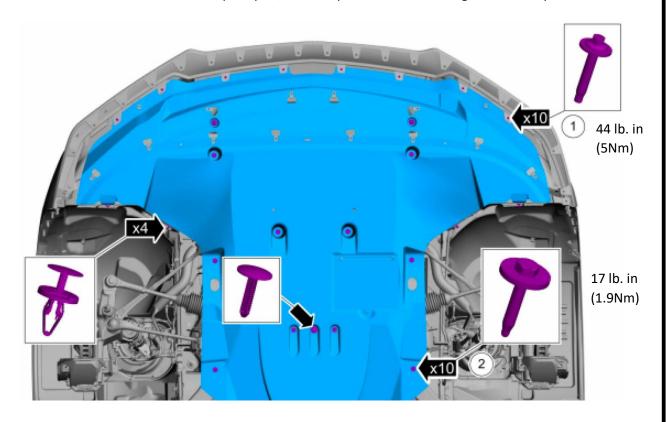




(6Nm)

# **Carbon Fiber Front Bumper Insert Panel**

6. On both sides, remove the push pin and bolts

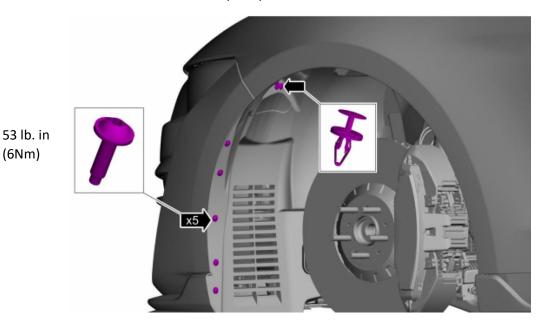


7. On both sides, remove push pins and position the fender liner aside






8. On both sides, disconnect the electrical connector

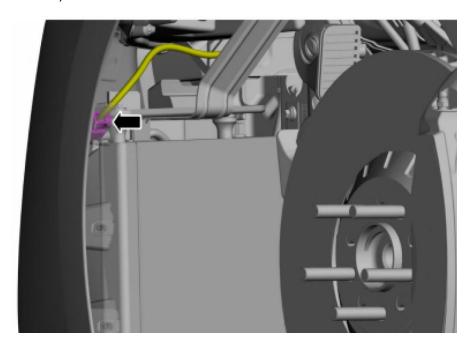


9. On both sides, remove the bolts, trim pin and separate the front bumper cover from the fender bracket

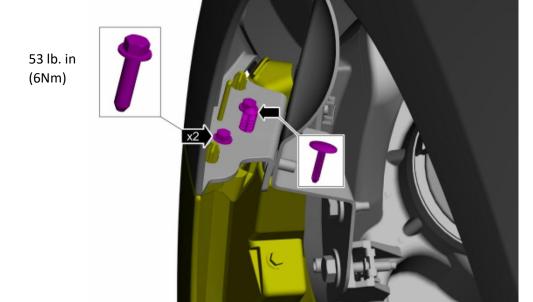




#### 10. Remove the screws

53 lb. in (6Nm)

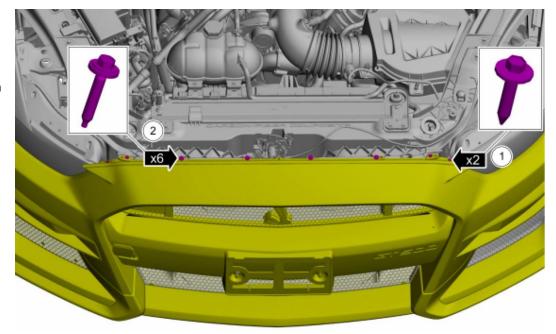

18 lb. in (2Nm)


- 11. With help of an assistant, remove the front bumper cover
  - Lift the front bumper cover up and off the alignment pins
  - Pull the front bumper cover forward and off the vehicle

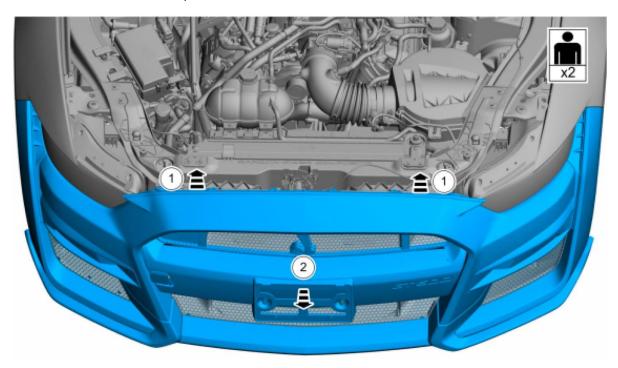




# **DISASSEMBLY – Front Bumper Insert Removal**


1. Access the back of front bumper cover

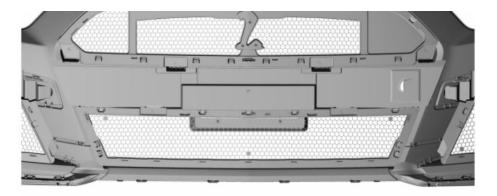

2. Remove the screws, release the tabs and remove the upper radiator grille panel

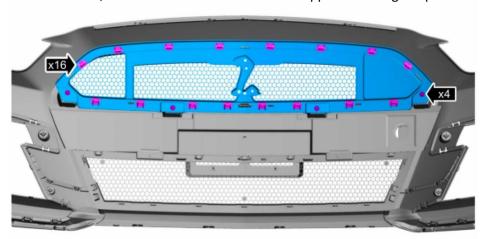


3. If equipped, remove the rivet blinds and the license plate bracket

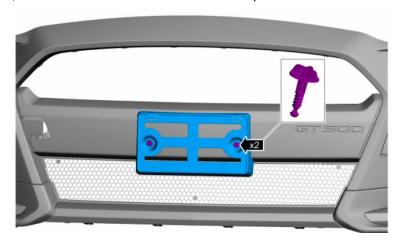



4. Remove the screws, the clips and release the tabs. Remove the lower radiator grille panel

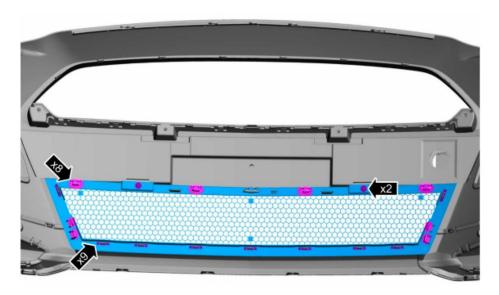

5. Release the tabs and remove the gloss black front bumper insert panel



#### **ASSEMBLY**

- 1. To assemble, reverse the disassembly procedure
- 2. Mounting tabs may require modifications for correct fitment; minor adjustments may be necessary as part of the normal installation process
- 3. Additional clips and hardware may be required from your Ford Parts Supplier if damaged upon disassembly
- 4. Carbon fiber products are hand-crafted, and no two items are identical. Tow hook cover may require clear silicone adhesive (not included) for positive retention



